



### Description

With a low profile sleek design, the LIFECO Sounder is ideal for standard installations and where aesthetics are an important consideration.

Suitable for conventional sounder circuits, notification alarm circuits and 2-Wire alarm systems. LIFECO Sounder's low operating current means it can easily be interfaced onto Analogue Addressable fire alarm systems with a suitable output module.

The LIFECO sounder can be flush mounted using a standard electrical single gang back box and surface mounted with the default back box.

Body colours available are Red and White.

### Features

- Aesthetically appealing design
- Sounder approved by UL to EN 54 Part 3
- Low current consumption, 6 mA
- Selectable Output, High: 92-96 dB(A) / Low: 86-90 dB(A)

### Specification

<b>Operating Voltage</b>	20 - 28 V dc
<b>Current Consumption</b>	14 mA at 24 V dc
<b>Weight</b>	0.06 kg
<b>Operating Temperature</b>	-5°C to +50°C
<b>Material</b>	Fire rated ABS



Flush Mounted


Surface Mounted

### Part Code

<b>LF-1010RFX</b>	Flush Mount, Red
<b>LF-1010RSX</b>	Surface Mount, Red
<b>LF-1010WFX</b>	Flush Mount, White
<b>LF-1010WSX</b>	Surface Mount, White

### Technical Drawing

#### Back Box

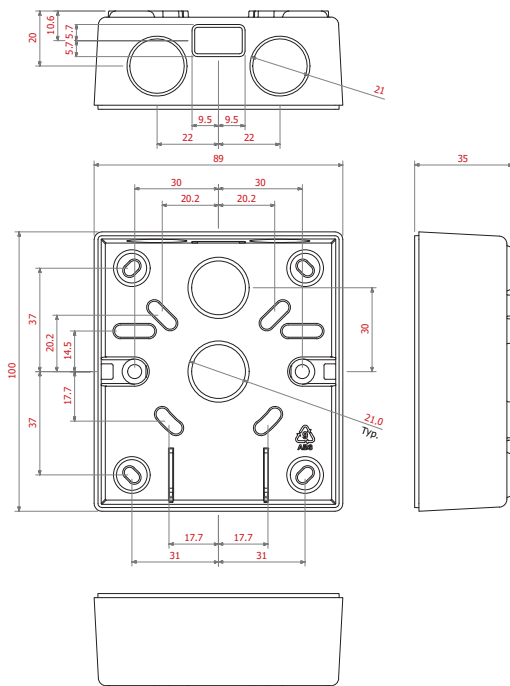

#### Sounder Unit

Dimensions: mm

